
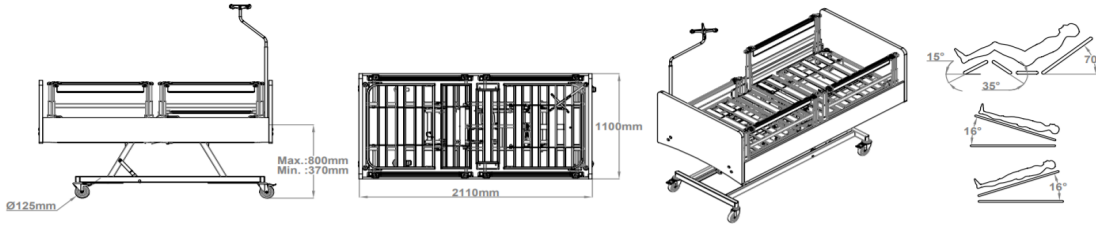


PRODUCT NAME	4 MOTORS PATIENT BED
PRODUCT BRAND	HB 7260 FUR / SERRA2 CARE BED
PRODUCT MODEL	
PRODUCT PICTURE	
	
TECHNICAL DRAWING	
	
TECHNICAL FEATURES	
1st MOTOR BRAND, MODEL, ORIGIN	LINAK / 3500 N / DC / IPX4 / LA27 or DEWERT / 4500 N / DC / IP66 / MEGAMAT2
2nd MOTOR BRAND, MODEL, ORIGIN	LINAK / 6000 N / DC / IPX4 / LA27 or DEWERT / 4000 N / DC / IP66 / MEGAMAT2
3rd MOTOR BRAND, MODEL, ORIGIN	LINAK / 6000 N / DC / IPX4 / LA27 or DEWERT / 6000 N / DC / IP66 / MEGAMAT2
4th MOTOR BRAND, MODEL, ORIGIN	LINAK / 6000 N / DC / IPX4 / LA27 or DEWERT / 6000 N / DC / IP66 / MEGAMAT2
MOVEMENTS BY MOTORS	BACKREST, LEGREST, HEIGHT, TRENDLENBURG, REVERSE TRENDLENBURG MOVEMENTS
CONTROL PANELS	PATIENT REMOTE CONTROLLER. OPTIONAL : NURSE CONTROL PANNEL WHICH CAN LOCK PATIENT REMOTE CONTROLLER USAGE
TRENDLENBURG / REVERSE TRENDLENBURG	TRENDLENBURG / REVERSE TRENDLENBURG BY MOTORS, MAX : 14°
HEAD & FOOT BOARDS + SIDE RAILS (4 PCS) STRUCTURE	HEAD PANNEL and FOOT PANNEL with 30 mm LAMINATE. SIDE RAILS; METAL, ALUMINIUM AND COMPACT MATERIAL
BED SURFACES	ELECTROSTATIC POWDER COTATED METAL
METAL STRUCTURE	WALL THICKNESS FOR BOX PROFILE : 1,2 - 2,0 mm. FOR PIPE 1,2 - 2,0 mm
COATING TYPE	NANO TECHNOLOGY ELECTROSTATIC POWDER COATING AND COATING THICKNESS MIN : 40 - 90 µm.
ELECTRONIC CPR	OPTIONAL : WITH NURSE CONTROL PANEL
MANUAL CPR	OPTIONAL : MANUAL CPR CAN BE CONTROLLED WITH THE HELP OF HANDLES ON THE RIGHT AND LEFT SIDES.
CASTORS	DIAMETER 125 mm / TENTE, HAION or RHOMBUS BRAND. 4 PIECES.
LOCKING OF CASTORS	LINEAR BRAKE AND DIRECTIONAL LOCK FOR LINEAR DIRECTION
AUTO REGRESSION	YES.100 mm
INFUSION POLE	OPTIONAL : STAINLESS STEEL, WALL THICKNESS 1,5 mm + PIPE OUTSIDE DIAMETER 25 mm, INNER DIAMETER 19 mm, with 4 PLASTIC HOOKS
DRAINAGE HOOKS & URINE BAG HOLDER	2 PCS
MANUAL KNEE MECHANISM	KNEE MECHANISM with RATCHET MECHANISM
BOTTOM FRAME SIZE	40 x 60 x 2 mm / 50 x 30 x 3 mm
UPPER FRAME SIZE	50 x 30 x 2 mm / 20 x 20 x 2 mm
OVERALL BED DIMENSION / WIDTH	1100 mm
OVERALL BED DIMENSION / LENGTH	2110 mm
OVERALL BED DIMENSION / HIGHT MIN	370 mm
OVERALL BED DIMENSION / HIGHT MAX	800 mm
MAX.SAFE CAPACITY	250 KG
MATRESS SIZE	860 x 2000 x 120 MM

STANDART SPECIFICATION

• MOTORIZED HEADREST ADJUSTMENT • MOTORIZED LEGREST ADJUSTMENT • MOTORIZED HEIGHT ADJUSTMENT • MOTORIZED TRENDELENBURG / REVERSE TRENDELENBURG ADJUSTMENT • HAND CONTROL UNIT • FOWLER AND VASCULAR POSITIONS • KNEE MOVES ADJUSTMENT WITH GRADUAL MECHANISM. • FIXED HEAD AND FOOT BOARDS MADE FROM WOOD DECORS • SIDE RAILS MADE FROM ALUMINIUM MATERIAL. • WOODEN TRAPEZE SIDE on BASEMENT • 360° MOVABLE CASTORS WITH LINEAR BRAKE AND DIRECTIONAL LOCK FOR LINEAR DIRECTION (125 mm) • ACCESSORIES SLOTS. • URINE BAG HOLDER. • ELECTROSTATIC POWDER COATING • METAL BED SURFACE. • MATTRESS NOT INCLUDED

OPTIONS

22 DENSITY MATTRESS	NURSE CONTROL PANNEL
32 DENSITY MATTRESS	BATTERY
VISCO MATTRESS	IV POLE
Q125 TENTE BRAND CASTORS (set)	LIFTING POLE (SELF HELP POLE)
CENTRAL LOCK Q125 (set)	BELT HOOK
MECHANICAL CPR for 4 MOTORS	